

MSV Series

3/2 Way Mechanical Valve

Features

- To be installed in moving devices like air cylinder, slide, etc.
- Various operating styles.
- Panel bore size Ø30 (Option Ø25).



How to order

MSV9832 - 02

N

R

G

3/2 Way	Port size	Thread	Operator			Operator color
	01: 1/8" (Option) 02: 1/4"	Blank: G N: NPT R: Rc	R: Roller TB: Twist selector LB: Long twist selector PB: Palm button (Mushroom)	PP: Palm button (Flush) PPL: Palm button (Extended) EB: Latching button	Blank: Standard color G: Green B: Black Y: Yellow	


Operator color

Operator	Standard	Option		
TB/LB	Black	Red	---	---
PB/PP/PPL	Red	Black	Green	Yellow
EB	Red	---	---	---

Specifications

Model	MSV9832-02
Port size	1/4" (Option 1/8")
Body material	Aluminum alloy
Panel dimension	30mm (Option:25mm)
Fluid	Compressed air
Sectional area	18mm ²
Operating pressure range	0 ~ 9 kgf/cm ²
Proof pressure	10 kgf/cm ²
Ambient temperature	-10°C ~ 60°C
Standard operator color	Black: TB, LB; Red: PB, PP, PPL, EB

Dimensions

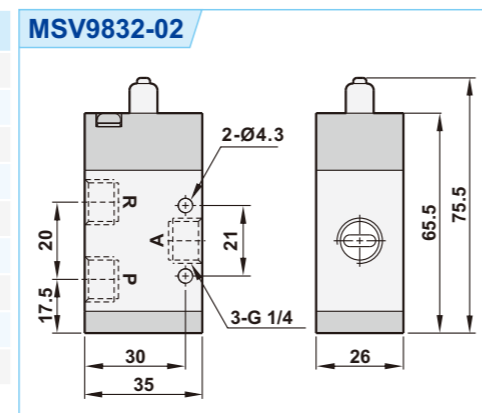

Dimensions

