

Features

1. Identical to ISO6432 $\phi 8 \sim \phi 25$.
2. Adjustable cushion at both ends is able to absorb vibration from high speed impact and provide stable movement.
3. Built in magnet for sensor use.
4. Caps are rolled and polished, which provides stable quality.
5. Stainless steel SUS304 barrel provides stable movement and features high quality and durable life.
6. Stainless steel SUS304 barrel features corrosion resistance and strongly mechanical strength.



How to order

PC	32	B50 C	SF	D	1	FA	Y	S	
Type	Bore size	Stroke	Cushion	Sensor	Type	Number of sensor	Mounting parts	Rod end joint	Rod material
PC: Standard integrated clevis PCC: Boss-cut PCD: Double rod PCA: Stroke adjustable 25mm PCB: Stroke adjustable 50mm PCH: Hollow double rod PCG: Dual stroke/Single rod/Boss-cut PCM: Dual stroke/Double rod PCF: Dual stroke/Single rod/Standard APC: Single acting/Spring return/Standard APCC: Single acting/Spring return/Boss-cut APD: Single acting/Spring extended/Standard APDC: Single acting/Spring extended/Boss-cut	8 : $\phi 8$ 10 : $\phi 10$ 12 : $\phi 12$ 16 : $\phi 16$ 20 : $\phi 20$ 25 : $\phi 25$ 32 : $\phi 32$ 40 : $\phi 40$	Blank: W/O cushion C: W/I cushion $\phi 16 \sim \phi 40$	Blank: W/O sensor SF: LED in front AL-20 ST: LED on top AL-21	Blank: Reed switch D: NPN E: PNP	1 pc 2 pcs	Blank: W/O mounting parts FA: Front flange FB: Rear flange CB: Female clevis LB: Foot mounting	Blank: W/O rod end joint Y: Double knuckle joint I: Single knuckle joint P: Eyebolt floating joint T: Basic floating joint L: Axial foot type floating joint F: Flange type floating joint	Blank: S45C (For $\phi 8, \phi 10, \text{SUS304}$) S: SUS304	

*Sensor please refer to P3-189~P3-190

How to order mounting parts

ZIPC	FA	—	20
PC series	Mounting parts		Bore size
	FA: Front flange FB: Rear flange CB: Female clevis LB: Foot mounting		12 : $\phi 12$ 16 : $\phi 16$ 20 : $\phi 20$ 25 : $\phi 25$ 32 : $\phi 32$ 40 : $\phi 40$

*Please refer to P3-42

How to order rod end joints

ZNF	Y	—	M6
	Rod end joint		Thread size
	Y: Double knuckle joint ($\phi 12 \sim \phi 40$) I: Single knuckle joint ($\phi 12 \sim \phi 40$) P: Eyebolt floating joint ($\phi 12 \sim \phi 40$) T: Basic floating joint ($\phi 8 \sim \phi 40$) L: Axial foot type floating joint ($\phi 20 \sim \phi 40$) F: Flange type floating joint ($\phi 20 \sim \phi 40$)		M4 : M4xP0.7 (PC8, 10) M6 : M6xP1.0 (PC12, 16) M8 : M8xP1.25 (PC20) M10 : M10xP1.25 (PC25, 32) M12 : M12xP1.25 (PC40)


*Please refer to P3-187~P3-188

Specifications

Bore size	$\phi 8$	$\phi 10$	$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$
Port size	M5xP0.8				1/8"			
Fluid	Compressed air							
Acting	Double acting or single acting							
Cushion	Adjustable type							
Operating pressure range	1.5 ~ 8.5 kgf/cm ²							
Max. operating pressure	9.5 kgf/cm ²							
Barrel material	Stainless steel SUS304							
Magnet	Built-in							
Ambient temperature	-5°C ~ 60°C							
Piston speed	50 ~ 700mm/Sec.							


Dimensions

PC Standard integrated clevis type

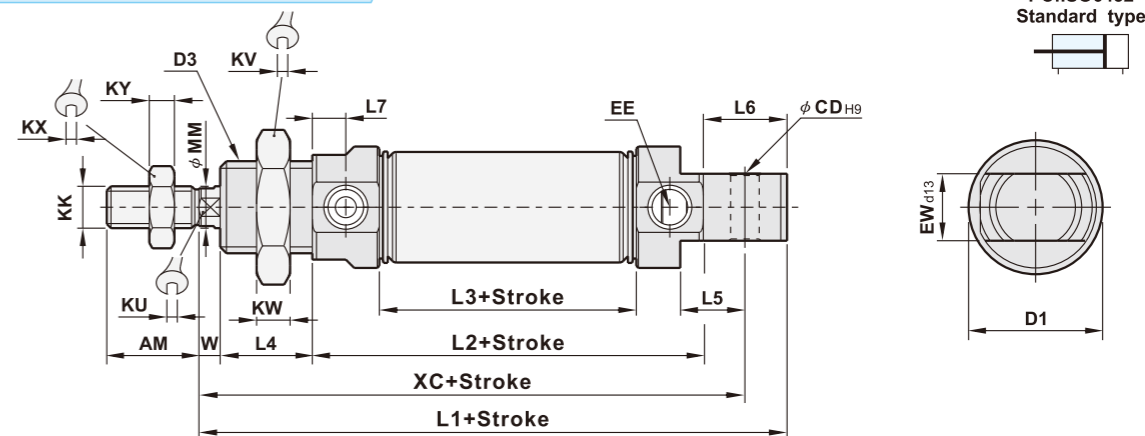

PC:ISO6432 Standard type

PCC Boss-cut type

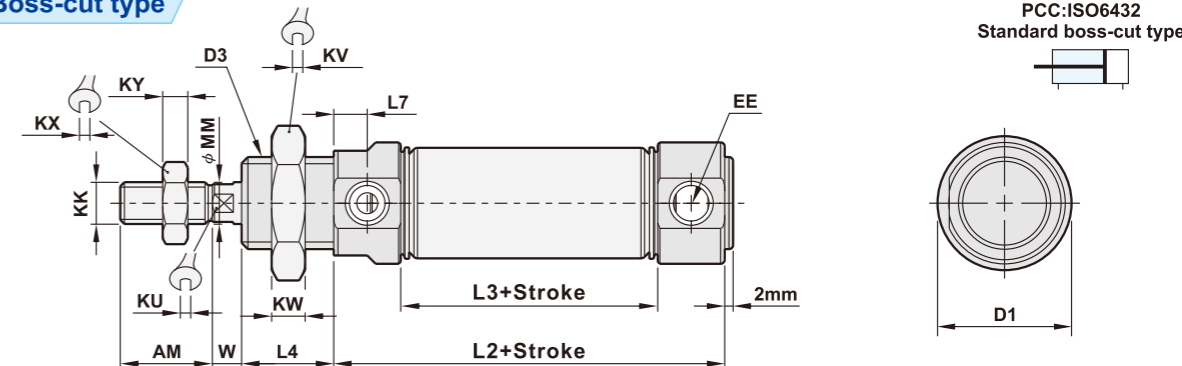

PCC:ISO6432 Standard boss-cut type


(Unit: mm)

Bore size	AM	D1	CD	D3	L1	L2	L3	L4	L5	L6	L7
$\phi 8$	12	17	$\phi 4$	M12xP1.25	71.4	43.4	25.4	12	6	12	4.5
$\phi 10$	12	17	$\phi 4$	M12xP1.25	71.4	43.4	25.4	12	6	12	4.5
$\phi 12$	16	20	$\phi 6$	M16xP1.5	84.4	45.4	27.4	17	9	17	4.5
$\phi 16$	16	20	$\phi 6$	M16xP1.5	90	51	31	17	9	17	5
$\phi 20$	20	29	$\phi 8$	M22xP1.5	109	67	36	18	12	18	7.75
$\phi 25$	22	29	$\phi 8$	M22xP1.5	117.5	69.5	37.5	20	12	20	8
$\phi 32$	22	37	$\phi 10$	M27xP2.0	133	83	47	20	13.5	22	9
$\phi 40$	24	45	$\phi 10$	M33xP2.0	138	85	49	20	13.5	22	9


Bore size	KK	KU	KV	KW	KX	KY	MM	W	EW	XC	EE
$\phi 8$	M4xP0.7	3.4	17	4	7	3.2	$\phi 4$	4	8	64	M5xP0.8
$\phi 10$	M4xP0.7	3.4	17	4	7	3.2	$\phi 4$	4	8	64	M5xP0.8
$\phi 12$	M6xP1.0	5	22	6	10	5	$\phi 6$	5	12	75	M5xP0.8
$\phi 16$	M6xP1.0	5	22	6	10	5	$\phi 6$	5	12	82	M5xP0.8
$\phi 20$	M8xP1.25	7	30	6	13	6	$\phi 8$	6	16	95	G 1/8
$\phi 25$	M10xP1.25	9	30	6	17	6	$\phi 10$	8	16	104	G 1/8
$\phi 32$	M10xP1.25	10	32	8	17	6	$\phi 12$	8	22	120	G 1/8
$\phi 40$	M12xP1.25	14	41	8	19	7	$\phi 16$	11	26	125	G 1/8

Dimensions

PCD Double rod type

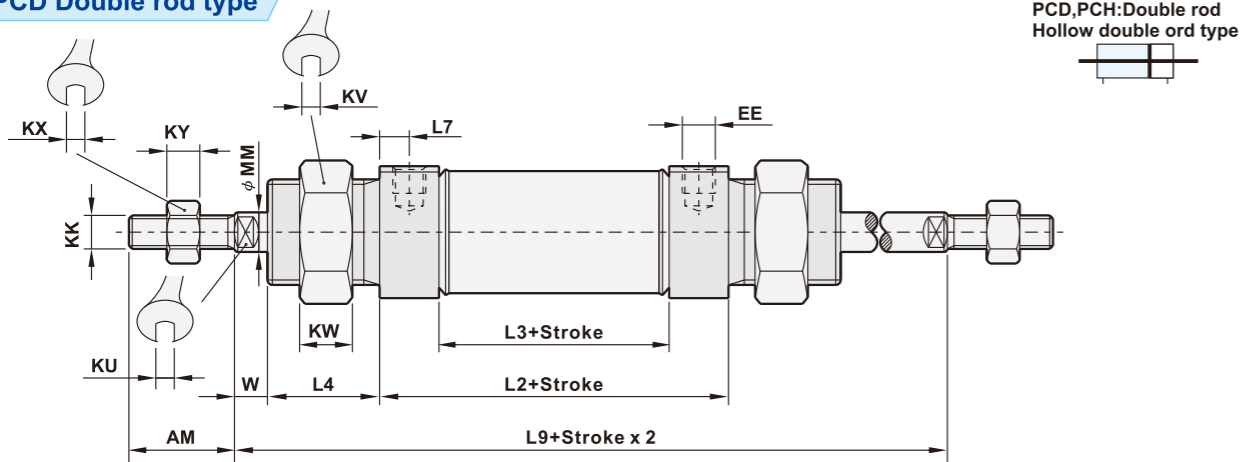

PCA, PCB Adjustable type

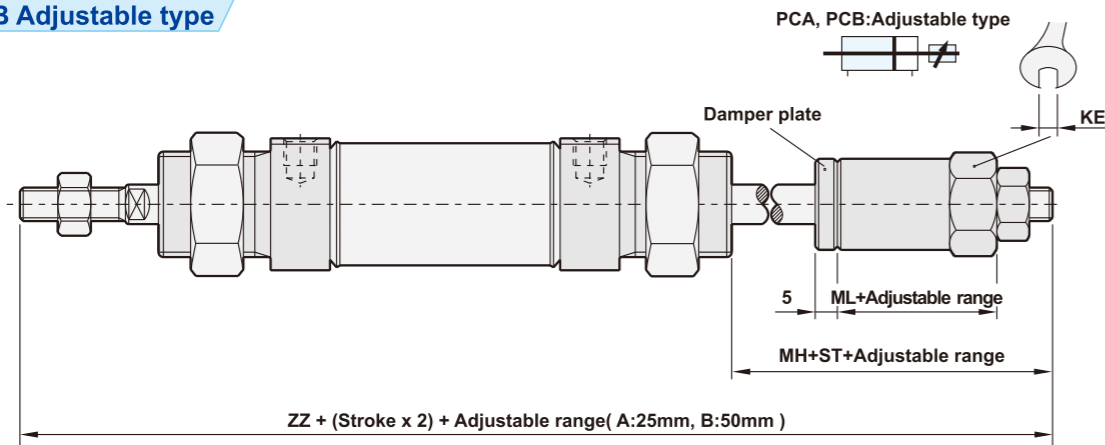


(Unit: mm)

Bore size	AM	L2	L3	L4	L7	L9	EE	KU	KV	KW	KX
φ 8	12	43.4	25.4	12	4.5	77	M5xP0.8	3.4	17	4	7
φ 10	12	43.4	25.4	12	4.5	77	M5xP0.8	3.4	17	4	7
φ 12	16	45.4	27.4	17	4.5	89.4	M5xP0.8	5	22	6	10
φ 16	16	51	31	17	5	95	M5xP0.8	5	22	6	10
φ 20	20	67	36	18	7.75	115	G 1/8	7	30	6	13
φ 25	22	69.5	37.5	20	8	125.5	G 1/8	9	30	6	17
φ 32	22	83	47	20	9	139	G 1/8	10	32	8	17
φ 40	24	85	49	20	9	147	G 1/8	14	41	8	19


Bore size	KY	MM	W	KK	ZZ	MH	ML	KE
φ 8	3.2	φ 4	4	M4xP0.7	108	23.8	13	8
φ 10	3.2	φ 4	4	M4xP0.7	108	23.8	13	8
φ 12	5	φ 6	5	M6xP1	134.4	34	20	12
φ 16	5	φ 6	5	M6xP1	140	34	20	12
φ 20	6	φ 8	6	M8xP1.25	162	33	20	17
φ 25	6	φ 10	8	M10xP1.25	172.5	33	20	17
φ 32	6	φ 12	8	M10xP1.25	188	35	22	22
φ 40	7	φ 16	11	M12xP1.25	195	35	22	27

Dimensions

APCC Single acting/Spring return/Boss-cut

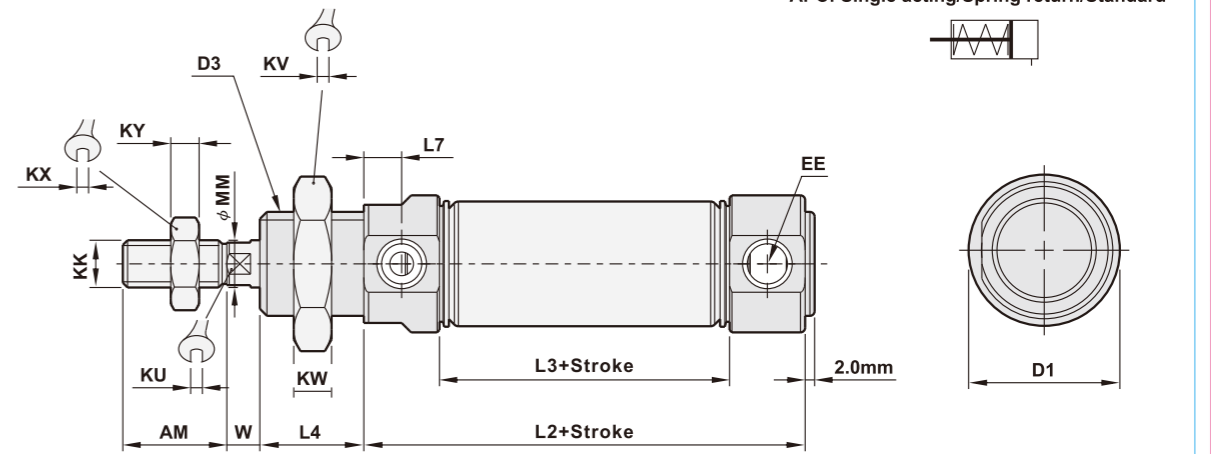

APC Single acting/Spring return/Standard

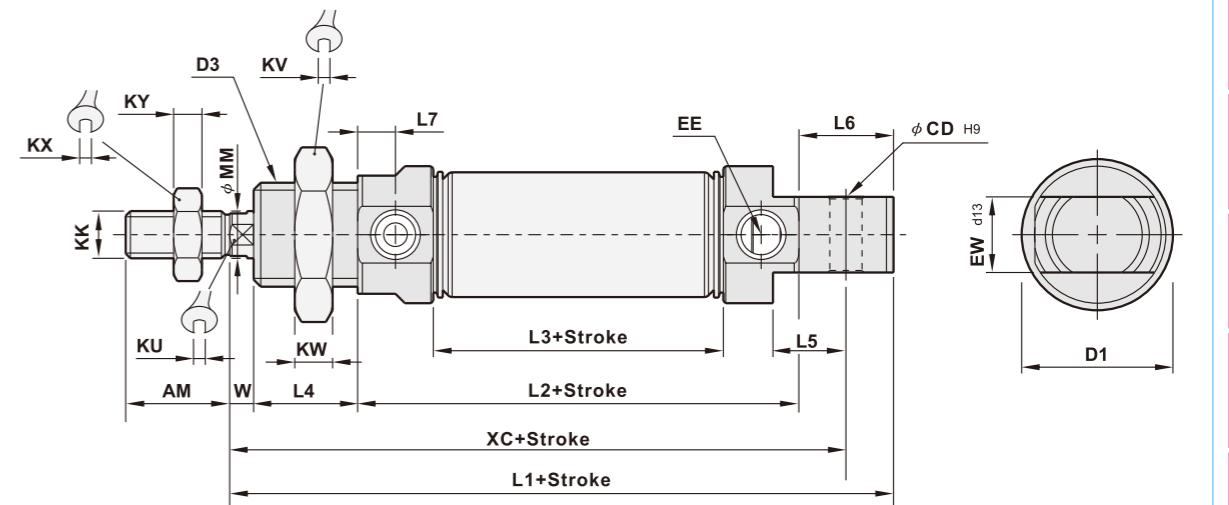


(Unit: mm)

Bore size	AM	D1	CD	D3	L1	L2	L3	L4	L5	L6
φ 20	20	29	φ 8	M22xP1.5	134	92	61	18	12	18
φ 25	22	29	φ 8	M22xP1.5	142.5	94.5	62.5	20	12	20
φ 32	22	37	φ 10	M27xP2.0	158	108	72	20	13.5	22
φ 40	24	45	φ 10	M33xP2.0	163	110	74	20	13.5	22


Bore size	L7	KK	KU	KV	KW	KX	KY	MM	W	EW	XC	EE
φ 20	7.75	M8xP1.25	7	30	6	13	6	φ 8	6	16	120	G 1/8
φ 25	8	M10xP1.25	9	30	6	17	6	φ 10	8	16	129	G 1/8
φ 32	9	M10xP1.25	10	32	8	17	6	φ 12	8	22	145	G 1/8
φ 40	9	M12xP1.25	14	41	8	19	7	φ 16	11	26	150	G 1/8

■ Dimensions

APDC Single acting/Spring extended/Boss-cut

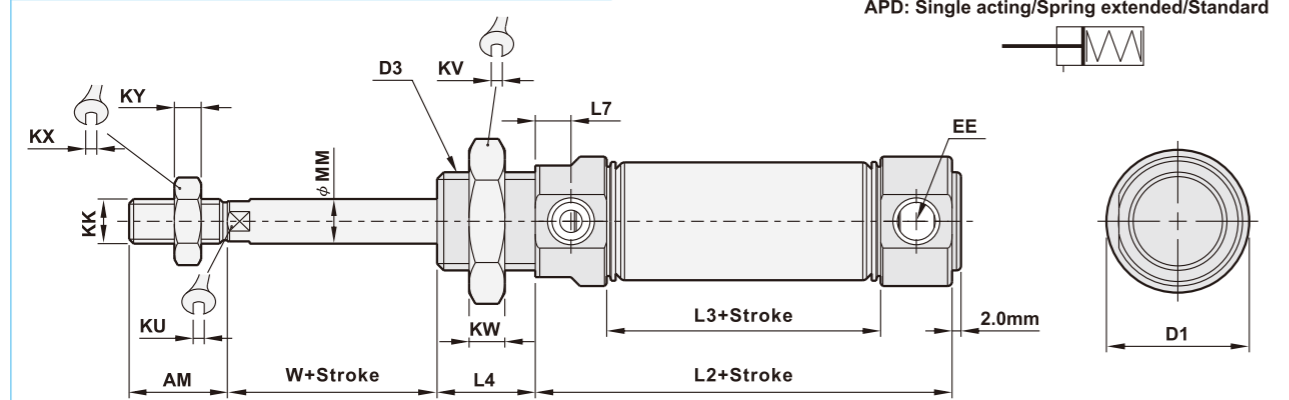

APD Single acting/Spring extended/Standard

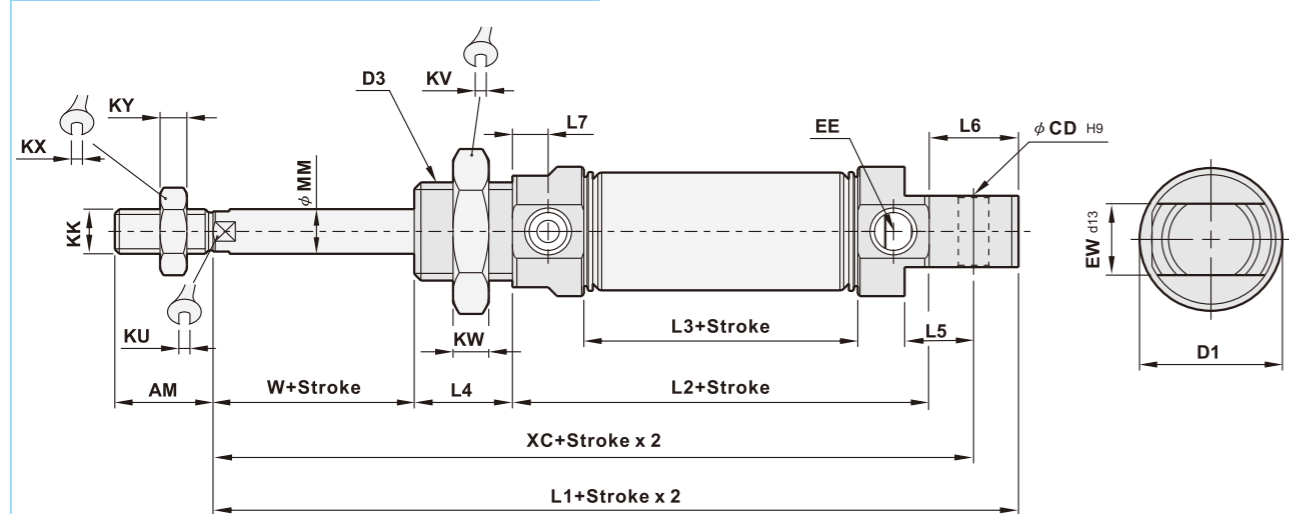


(Unit: mm)

Bore size	AM	D1	CD	D3	L1	L2	L3	L4	L5	L6
φ 20	20	29	φ 8	M22xP1.5	134	92	61	18	12	18
φ 25	22	29	φ 8	M22xP1.5	142.5	94.5	62.5	20	12	20
φ 32	22	37	φ 10	M27xP2.0	158	108	72	20	13.5	22
φ 40	24	45	φ 10	M33xP2.0	163	110	74	20	13.5	22

Bore size	L7	KK	KU	KV	KW	KX	KY	MM	W	EW	XC	EE
φ 20	7.75	M8xP1.25	7	30	6	13	6	φ 8	6	16	120	G 1/8
φ 25	8	M10xP1.25	9	30	6	17	6	φ 10	8	16	129	G 1/8
φ 32	9	M10xP1.25	10	32	8	17	6	φ 12	8	22	145	G 1/8
φ 40	9	M12xP1.25	14	41	8	19	7	φ 16	11	26	150	G 1/8

■ Dimensions

PCH Hollow double rod type

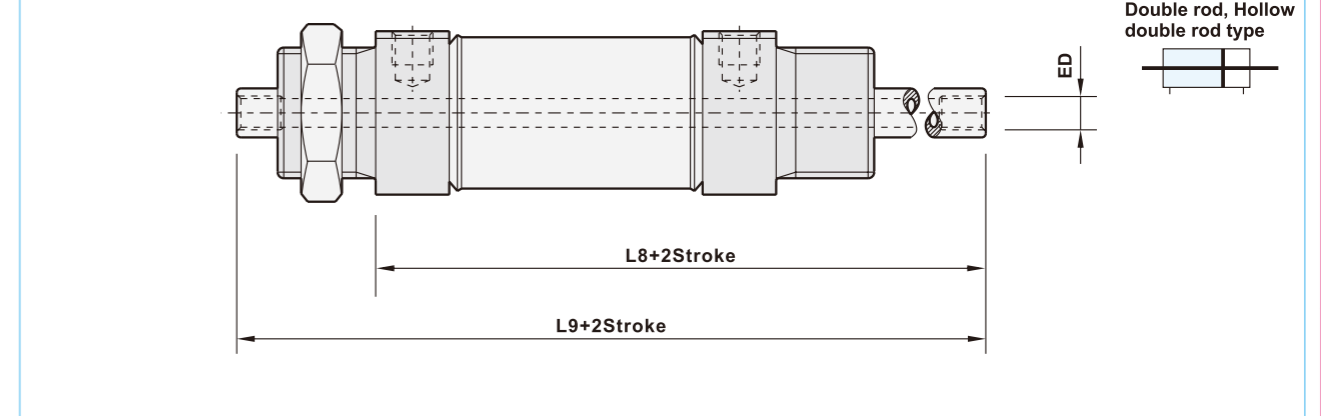


(Unit: mm)

Bore size	L8	L9	ED
φ 25	98	126	M5xP0.8x20
φ 32	112	140	PT1/8
φ 40	116	147	PT1/8

- Suitable for vacuum pad.
- Vacuum pad and other devices could be directly screwed on to rod end.
- Permanent magnetic is built-in.

*Please refer to page 3-42 PC standard integrated clevis type for other dimensions.

PCM Dual stroke/Double rod

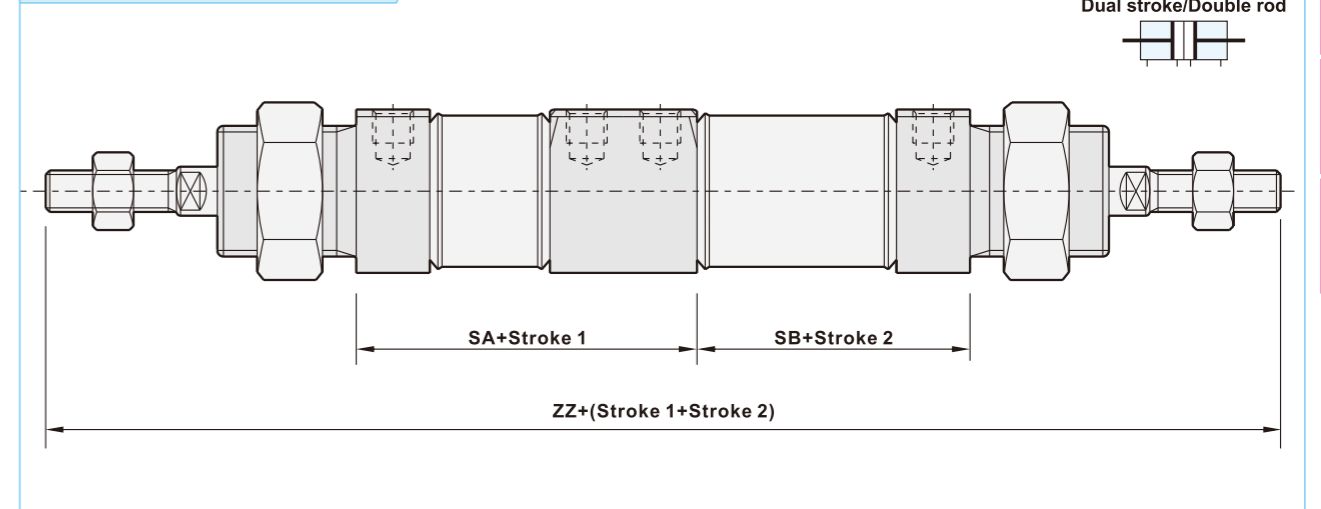

(Unit: mm)

Bore size	SA	SB	ZZ
φ 25	85.5	53.5	239
φ 32	101.5	65.5	267
φ 40	103	67	280


- Two cylinders are constructed as one cylinder in a shrinking back configuration.
- Cylinder stroke could be controlled in three or four steps.
- One end of piston rod is fixed, the cylinder barrel executes the movement, the cylinder must connected with flexible line connections.
- Applicable to positioning transportation, quantitative filling, right and left displacement, capable flow control...etc, which is for accuracy and speedy purpose.

*Please refer to page 3-42 PC standard integrated clevis type for other dimensions.


Dimensions

PCG Dual stroke/Single rod/Boss-cut

PCG: Dual stroke/Single rod/Boss-cut
PCF: Dual stroke/Single rod/Standard

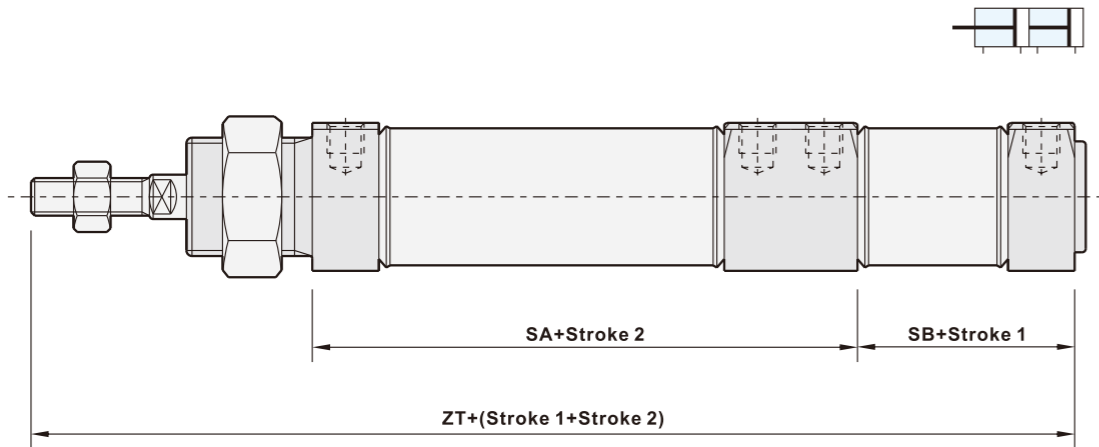

PCF Dual stroke/Single rod/Standard

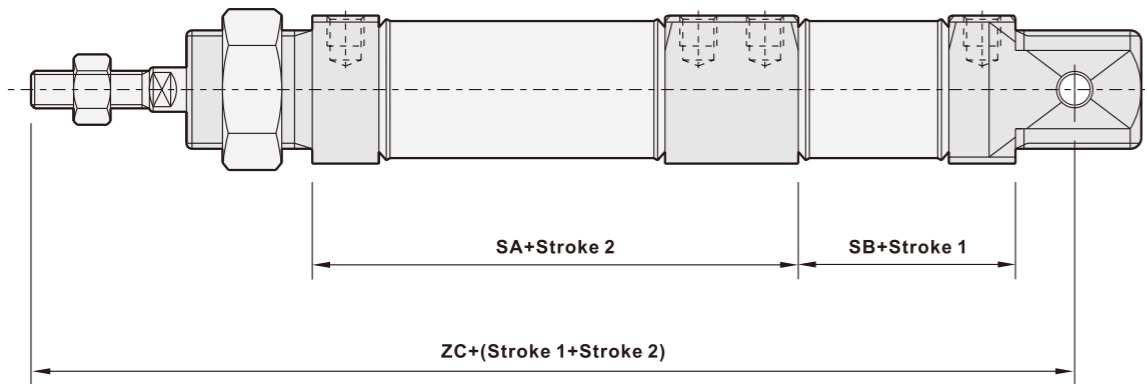

(Unit: mm)

Bore size	SA	SB	ZC	ZT
φ 32	101.5	65.5	225.5	217
φ 40	103	67	234	225

- The cylinder constructed as one cylinder in line allows double the output force.
- Cylinder stroke could be controlled in three steps.
- Applicable to position transportation, quantitative filling and flow control, right and left displacement.
- Adjustable cushions on both ends.
- Permanent magnet is built-in.


*Please refer to page 3-42 PC standard integrated clevis type for other dimensions.

Mounting Parts

For ISO air Cylinder

Dimension of mounting parts


FA, FB Front & Rear flange

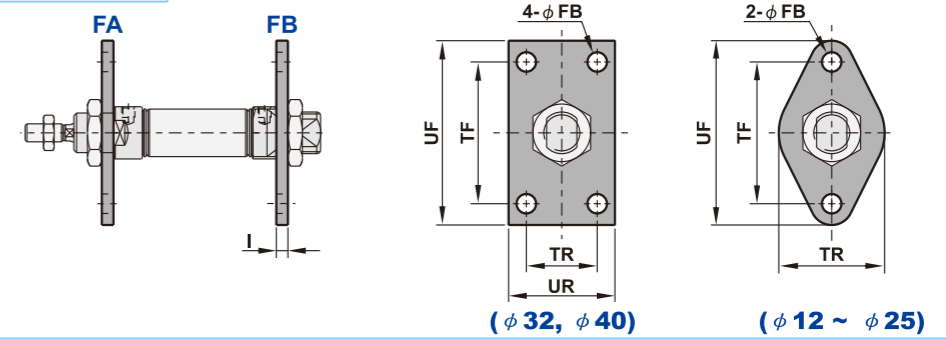

(Unit: mm)

Bore size	TF	TR	UF	UR	I	FB	Bore size	TF	TR	UF	UR	I	FB
φ 12	40	--	52	30	3	φ 5.5	φ 25	50	--	66	40	3	φ 6.5
φ 16	40	--	52	30	3	φ 5.5	φ 32	50	26	64	40	3	φ 7
φ 20	50	--	66	40	3	φ 6.5	φ 40	54	30	74	50	4	φ 7


CB Female clevis

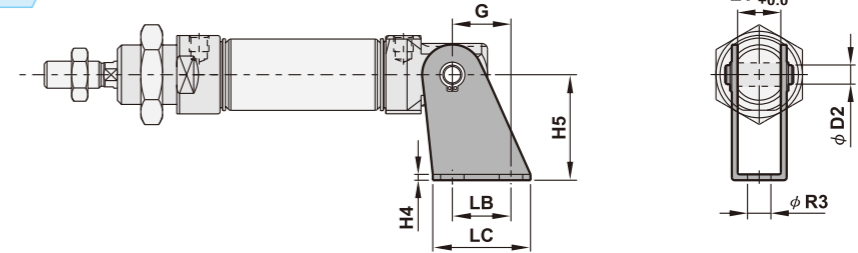

(Unit: mm)

Bore size	LB	LC	EV	H4	H5	G	D2	R3	Bore size	LB	LC	EV	H4	H5	G	D2	R3
φ 12	15	25	12	3	27	15	φ 6 ^{+0.03} _{+0.0}	φ 6	φ 25	20	32	16	3	30	18.5	φ 8 ^{+0.04} _{+0.0}	φ 7
φ 16	15	25	12	3	27	15	φ 6 ^{+0.03} _{+0.0}	φ 6	φ 32	25	40	22	3	40	22.5	φ 10 ^{+0.03} _{+0.0}	φ 9
φ 20	20	32	16	3	30	18.5	φ 8 ^{+0.04} _{+0.0}	φ 7	φ 40	25	40	26	3	40	22.5	φ 10 ^{+0.03} _{+0.0}	φ 9


LB Foot mounting

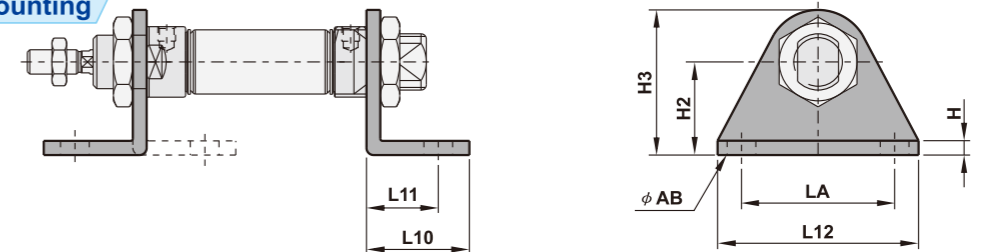

(Unit: mm)

Bore size	L10	L11	L12	LA	H	H2	H3	AB	Bore size	L10	L11	L12	LA	H	H2	H3	AB
φ 12	20.5	14	42	32	3	20	33	φ 6	φ 25	26	17	54	40	3	25	45	φ 7
φ 16	20.5	14	42	32	3	20	33	φ 6	φ 32	25	18	64	50	3.5	28	48	φ 7
φ 20	26	17	54	40	3	25	45	φ 7	φ 40	30	20	74	54	4	31.5	60	φ 7

Material of parts

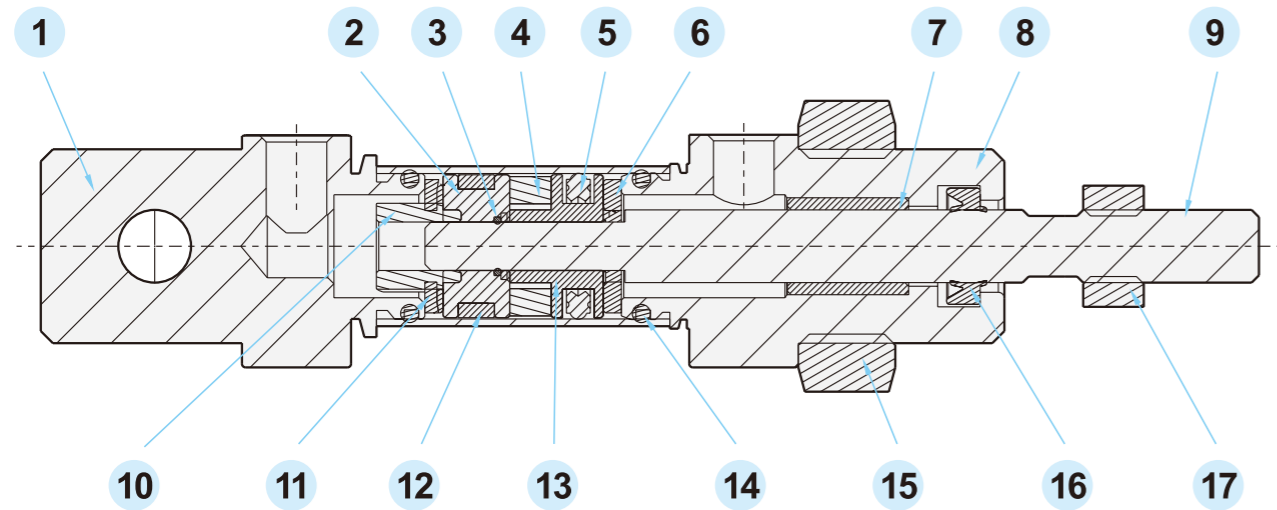

No.	Description	Material	Qty.	No.	Description	Material	Qty.
1	Rear cover	Aluminum alloy	1	10	Nut	Fe+Ni	1
2	Wear ring	Teflon +Graphite	1	11	Rear piston	Aluminum alloy	1
3	O-ring	NBR	1	12	Barrel	SUS304	1
4	Magnet	Rubber	1	13	Front piston	Aluminum alloy	1
5	U piston seal	NBR	1	14	O-ring	NBR	2
6	Bumper	NBR	2	15	Fixing nut	SS41+Ni	1
7	Bushing	Brass	1	16	Rod seal	NBR	1
8	Front cover	Aluminum alloy	1	17	Nut	Fe+Ni	1
9	Piston rod	S45C+Cr	1				

Stroke table

Bore size	Acting	Standard stroke(mm)	Max. Standard stroke(mm)
φ 8 ~ φ 12	Double acting	5 ~ 250	300
φ 16 ~ φ 40	Double acting	5 ~ 500	900
φ 20 ~ φ 40	Single acting	25, 50	---

Note: Please contact our sales for non-standard stroke.

Memo...

Area with horizontal dashed lines for notes.

